

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE  
REQUEST FOR FILING APPLICATION UNDER 37 CFR 53(b)  
WITHOUT FILING FEE OR EXECUTED INVENTOR'S DECLARATION

Assistant Commissioner for Patents  
Washington, D.C. 20231

Atty. Dkt. 871-65  
Date: August 17, 1999

This is a request for filing a new PATENT APPLICATION under Rule 53(b) entitled:

**LINEAR PERSONALIZATION MACHINE**

without a filing fee and/or without an executed inventor's oath/declaration.

This application is made by the below identified inventor(s). Attached hereto are the following papers:

- ☒ An abstract together with  
14 pages of specification and claims including  
12 numbered claims and also attached is/are  
4 sheets of accompanying drawings.  
☐ This application is based on the following prior foreign application(s):

Application No.	Country	Filing Date
-----------------	---------	-------------

respectively, the entire content of which is hereby incorporated by reference in this application, and priority is hereby claimed therefrom.

- ☐ This application is based on the following prior provisional application(s):

Application No.	Filing Date
-----------------	-------------

respectively, the entire content of which is hereby incorporated by reference in this application, and priority is hereby claimed therefrom.

- ☐ Certified copy/ies of foreign applications attached.  
☐ This application is a ☐ continuation/☐ division/☐ continuation-in-part of application Serial No. , filed .  
☐ Please amend the specification by inserting before the first line: --This application is a ☐ continuation/☐ division/☐ continuation-in-part of application Serial No. , filed , the entire content of which is hereby incorporated by reference in this application.--  
☐ Please amend the specification by inserting before the first line: --This is a continuation of PCT application No. , filed , the entire content of which is hereby incorporated by reference in this application.--  
☐ Please amend the specification by inserting before the first line: --This application claims the benefit of U.S. Provisional Application No. , filed , the entire content of which is hereby incorporated by reference in this application.--  
☐ Preliminary amendment to claims (attached hereto), to be entered before calculation of the fee.  
☐ Also attached.

1. Inventor: **Simon** **ORMEROD** **France**  
(first) MI (last) (citizenship)  
Residence: (city) **LOURY** (state/country) **France**  
Post Office Address: **1095, rue Saint Michel, LOURY, France**  
(incl zip code) **45470**
2. Inventor: **Jean-Marc** **BERNARD** **France**  
(first) MI (last) (citizenship)  
Residence: (city) **LA CHAPELLE SAINT MESMIN** (state/country) **France**  
Post Office Address: **2, rue Cesar Franck, LA CHAPELLE SAINT MESMIN, France**  
(incl zip code) **45380**
3. Inventor: **Francis** **PERIN** **France**  
(first) MI (last) (citizenship)  
Residence: (city) **GIDY** (state/country) **France**  
Post Office Address: **428 rue de la Vallee, GIDY, France**  
(incl zip code) **45520**

Address all future communications to NIXON & VANDERHYE P.C., 1100 North Glebe Rd, 8<sup>th</sup> Fl., Arlington, VA 22201.  
1100 N. Glebe Road, 8th Floor  
Arlington, Virginia 22201  
Telephone: (703) 816-4000  
Facsimile: (703) 816-4100

**NIXON & VANDERHYE P.C.**  
By Atty.: **Joseph S. Presta**, Reg. No. 35,329

Signature: \_\_\_\_\_

JSP:maw

Our Ref.: 871-65  
LEROUX/10/US

# ***U.S. PATENT APPLICATION***

***Inventor(s):*** Simon ORMEROD  
Jean-Marc BERNARD  
Francis PERIN

***Invention:*** LINEAR PERSONALIZATION MACHINE

***NIXON & VANDERHYE P.C.  
ATTORNEYS AT LAW  
1100 NORTH GLEBE ROAD  
8<sup>TH</sup> FLOOR  
ARLINGTON, VIRGINIA 22201-4714  
(703) 816-4000  
Facsimile (703) 816-4100***

## ***SPECIFICATION***

652790\*4656650

LINEAR PERSONALIZATION MACHINEFIELD OF THE INVENTION

The present invention relates to a linear personalization machine.

BACKGROUND OF THE INVENTION

5           Personalization machines of the prior art are made up of a rotating platform comprising a plurality of connection devices each associated with a card from a plurality of memory cards. These personalization machines are arranged in a card processing line comprising a  
10   unstacking device, an electric testing station, two ejection stations, a turnover station, an ink marking station and a stacking station. When in operation, the unstacking device ejects a memory card at regular intervals onto a transfer system (3) for portable  
15   objects. At the electric testing station the quality of the electronic chips for the cards is checked. Any faulty memory cards are expelled from the processing line system while valid cards are routed towards the personalization station. Personalization consists of entering  
20   instructions and/or information into each memory card which are particular to the card or particular to the application. This information is entered either via magnetic waves into contactless cards or via pins into contact cards, or for mixed-type contact and contactless  
25   cards by either one or by both of these insertion means. After personalization, the faulty cards are ejected by a further ejection station, while non-faulty cards are optionally returned to be ink or laser marked recto verso, then stacked at a stacking station. A computer  
30   system manages the personalization of all the cards. A

554789-465260

personalization machine of this type is disclosed by patent application FR 96 03410 filed by the same applicant.

#### OBJECTS AND SUMMARY OF THE INVENTION

- 5 The purpose of the present invention is to provide a linear personalization machine of simpler, less costly construction.

10 This linear personalization machine may easily be adapted in lieu and stead of a conventional personalization machine. Also, this personalization machine is more compact as it takes up less space on a card processing line. With this advantage, card processing lines of shorter length can be built.

- 15 This purpose is attained through the fact that the linear personalization machine, comprising a transfer system for portable objects, incorporating an integrated circuit, is characterized in that it comprises a personalization elevator that is translated vertically and sequentially on a guide support by driving and positioning means, said elevator being made up of a  
20 parallelepiped plate fitted with a plurality of connection devices, of mixed or unmixed type, connecting to the integrated circuit of the portable objects, that are brought in sequential manner in front of an  
25 incoming/outgoing station on the transfer line.

- According to one particular aspect of the present invention, said guide support is made up of parallelepiped plate whose length is approximately equal to twice the length of said personalization elevator, and  
30 comprises a vertical slit, two vertical rails and two pulleys joined together by a belt.

652730 16E5/E60

According to another particular aspect, the driving and positioning means are made up of a means to hold and slide said elevator on said rails of said guide support, a driving fixation fixing the elevator firmly to the belt of the guide support, the vertical slit of the guide support forming a track for the driving fixation of said elevator, the driving and positioning means also enabling each fixed platform to be brought to a halt level with the portable objects in the alignment of said transfer system for portable objects.

According to a further particular aspect, said belt of said guide support is periodically set in motion by an electric motor or other power means such that the up and down movements of said elevator along the guide support are regularly interrupted at the level of the incoming/outgoing position on the transfer line so as to allow loading and unloading of the portable objects.

According to another particular aspect, the driving fixation located in the center of said parallelepiped plate comprises means, at its end point, for anchoring to said belt of said guide support.

A further purpose of the invention is to provide a faster personalization machine. This purpose is reached through the fact that the linear personalization machine comprises a decoder package connected to each first parallel port of each personalization card by an address bus and a data bus, said personalization cards being connected in parallel to a backplane computer via a second parallel port. The form of the present personalization machine combined with a new device means that said personalization information can be sent in parallel.

662780-165260

A third object of the invention is to provide a personalization machine which is able to test the electric quality of an electronic chip or the quality of a magnetic strip of a portable object both before and after its personalization. With this personalization machine it is also possible to re-launch card personalization automatically whenever personalization is faulty.

This purpose is achieved through the fact that the connection devices can test the electronic chips and activate the electric contacts and/or contactless terminals of said portable objects.

According to one particular aspect of the invention, when the connection devices have detected a faulty portable object, the latter is expelled from said elevator before its personalization.

According to another particular aspect, the personalization machine comprises computer means for personalization control and management.

According to another particular aspect, said means for personalization control and management trigger a substitution sequence whenever a personalization defect on a portable object is signaled.

According to another particular aspect, the connection devices test the quality of the personalization of the portable objects and signal any personalization defects to the control and management means.

According to a further particular aspect, an ejection station located at the exit of said personalization machine tests the quality of personalization of the portable objects and signals any

66-1130-1052460

personalization defects to the control and management means.

Other particular aspects and advantages of the present invention will be clearer understood on reading  
5 the following description with reference to the appended drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

- figure 1 shows a side view of a personalization elevator
- 10 - figure 2 shows a front view of a guide support according to the invention,
- figure 3 shows a side view of a guide support according to figure 2,
- figure 4 shows a side view of the linear  
15 personalization machine in a card processing line
- figure 5 shows a front view of the personalization machine according to figure 4,
- figure 6 shows a diagram of the electronic circuits required for the personalization of contact,  
20 contactless, or mixed-type cards.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

The invention which is to be disclosed in connection with figures 1 to 6 comprises a table (1) on which is arranged a card processing line. Figure 5 shows  
25 a front view of a processing line successively comprising an unstacking station (9), at which the cards are stored in a pile prior to their personalization, a linear personalization machine (10) an ejection station (6) which tests the cards and expels faulty cards from the  
30 processing line, and finally a stacker (5) of personalized cards. A transfer system (3) allows the

662780 46332860

memory cards to be taken from one station to another. It is formed by a continuous notched belt (31) circulating between two pulleys (33, 32) driven by a motor (30). On this endless belt (31) stops are mounted to hold the cards in place during their transfer to permit their extraction and depositing by each of the personalization heads (22i, 22n) of the elevator.

The personalization machine comprises a personalization elevator translated vertically over a guide carrier (70) by driving and positioning means.

The personalization elevator (20) shown in figure 1 is made up of parallelepiped plate (23) provided on one of its surfaces, having the greatest surface area, with a plurality of connection devices forming personalization heads (22i, 22n) and, on its opposite surface, with a driving fixation (28) and sliding guide means (24), for example lateral means, for guiding by sliding in a rail. These sliding guide means may for example be made up of a runner.

20           Personalization may be made using so-called  
"chip" cards or "integrated circuit" cards, whose  
integrated circuit is connected to the outside world  
either by contacts whose contact areas are each connected  
by conductors to the entry points of the integrated  
25   circuit, or by an antenna. In this case, the card is a  
so-called "contactless" card and communicates by Hertzian  
waves or electromagnetic waves with another antenna  
connected either to a terminal or to the personalization  
machine. Or the card may be of mixed type comprising both  
30   a connection means by contact with a terminal or to the  
personalization machine and contactless connection means  
to the terminal or personalization machine. Therefore,  
through the use of contacts (225) of the connection head



(224) or through the use of the antenna (2271) of the fixed platform (227) the personalization machine is able to personalize contact cards, contactless cards or mixed-type cards. Each connection device (22i) therefore  
5 comprises a fixed platform (227) integral with plate (23) and a connection head (224).

Figures 2 and 3 show a front and side view of the guide support (70). It is made up of a parallelepiped plate (71) whose length is approximately equal to twice  
10 the length of the personalization elevator (20). Said plate (71) comprises, at its center, a vertical slit (72) that is sufficiently wide to allow entry of the driving fixation (28) of elevator (20). The length of slit (72) is approximately equal to the length of the  
15 personalization elevator (20) such that elevator (20) can slide from top downwards over the entire surface of the guide support (70). Also, two vertical rails (73) are arranged on the surface (710) having the greatest surface area of plate (71). And surface (720) of plate (71)  
20 parallel to surface (710) comprises two pulleys (74) joined together by belt (75).

When in operation, personalization elevator (20) is translated vertically on guide support (70). For this purpose, driving fixation (28) of elevator (20) is  
25 inserted in slit (72) of the guide support and is then firmly anchored to belt (75). Finally, belt (75) of said guide support (70) is set in motion by means of an electric motor or other power means. Belt (75) when moving causes driving fixation (28) to move, said slit  
30 (72) forming a track for driving fixation (28). Consequently, via belt (75) and driving fixation (28) the power means moves the elevator along the guide support. The motor supply is periodically cut off when the fixed

662130-15E5/EE0

platform (227) of a connection device (22i) that is free or respectively engaged is level with the portable objects (4) located in transfer system (3) such as to allow their respective loading and unloading on or off  
5 personalization elevator (20).

Connection devices (22i) comprise a fixed platform (227) integral with parallelepiped plate (23) and a mobile element (22i) carrying a connection head (224). With each connection head (224) and each fixed  
10 platform (227) of a connection device (22i, 22n) a personalization card (21i, 21n) is associated, positioned in a personalization rack by a connection cable (29). As shown in figure 6, each connection head (224) comprises a plurality of pins (225) mounted on elastic means and  
15 electrically connected to a connector (2241) which ensures connection to a wire sheet (254) connected by another connector (253) to a decoder package (250) for addressing and routing data towards the head whose address corresponds to the one transmitted on the address  
20 bus. Fixed platform (227) is in non-conductor material such as a plastic material and, embedded in its mass, comprises a transmission and reception antenna (2271) which is connected by a connector (2272) and a wire (255) to a second connector (252) of decoder package (250).  
25 This package comprises an antenna interface circuit (251) and is connected to the electronic personalization boards by an address bus (257) and a data bus (256). Address bus (257) and data bus (256) forming cable (29) are connected to the personalization boards (21i) by a parallel port  
30 (216). One bus (210) of the personalization board is also connected to the parallel port (216). Bus (210) is also connected to a microprocessor of the personalization board which executes the personalization program of the electronic cards, which program is loaded in a memory

003304 03199  
000000 000000

(213) of board (21i). Finally the microprocessor also has access, via bus (210) and connector (214) connected to this bus (210) to a security memory card (4s) so-called "mother" card whose function is to provide the security information needed for personalization. Finally, bus (210) of each board is connected by a parallel port (215) to a backplane computer (241). Another computer of P.C. type (243) having a parallel connection with the first computer manages machine control and receives information from the positioning and detection devices such as, for example, the device ensuring the positioning of a chip card to be personalized on the fixed platform (227) of a connection device. The personalization program loaded in the memory (213) recognizes card types and has an algorithm and the necessary instructions to address information to the connection devices (22i, 22n) by connector (253) and (252) respectively which correspond to contact cards and contactless cards respectively. For mixed-type cards decoder package (250) will give access to the card via contact connector (253) for personalization of some so-called "non-security" parts and will access the card via connector (252) connecting with the antenna to transmit security information via the contactless part. This security information is taken from a "mother" security card (4s) by connector (214) during the personalization of so-called "security" functions or applications. Therefore, the personalization program will comprise means of selectively addressing information towards either one of the connectors.

When in operation, the memory or chip cards are loaded from the transfer system (3) onto fixed platform (227) of the connection devices using an already known card loading and unloading device. Said device, for example of jack type, permits proper positioning of each

card on the fixed part (227) of connection device (22i). For more details on the card loading and unloading device reference can be made to patent application FR 9803410 filed by the same applicant. When a card (4i) is loaded  
5 on the fixed platform (227) of the connection device (22i), elevator (20) respectively moves up or down over a distance equal to the distance separating two contiguous connection devices (22i, 22j) and another chip card (4j) is loaded onto fixed platform (227) of the following  
10 connection device (22j). These respective stages of upward and downward movement and of card loading are repeated until all the connection devices are loaded. Then elevator (20) moves down, respectively moves up, such that the first connection device is level with the  
15 transfer line. The first card (4i) which was loaded in the elevator is unloaded from the fixed platform (227) of connection device (22i) onto the transfer line and a new chip card to be personalized is loaded on connection device (22i). During the personalization phase of this  
20 new chip card, elevator (20) moves down, respectively moves upwards, over a distance equal to the distance separating the two contiguous connection devices and a new unloading phase of a personalized chip card and loading of a non-personalized chip card begins.

25 According to another embodiment of the invention, the mixed-type connection device of the personalization elevator comprises an electrical testing device which tests the memory or chip cards as soon as they arrive on the fixed platform (227). If the loaded memory or chip  
30 card is faulty, it is directly unloaded from the elevator (20) onto transfer system (3) then expelled by the ejection station (6) and the personalization elevator is loaded with a new memory or chip card. If this card is

valid, the elevator moves up or down such that a new chip card may be loaded on the following fixed platform.

Other modifications within the reach of persons skilled in the art also come under the spirit of the  
5 invention.

66730\*4625260

CLAIMS

- 1.Linear personalization machine, comprising a transfer system (3) for portable objects (4), incorporating an integrated circuit, characterized in that it comprises a personalization elevator (20) translated vertically and sequentially on a guide support (70) by driving and positioning means (24, 73, 28, 75, 72), said elevator (20) being made up of a parallelepiped plate (23) fitted with a plurality of connection devices whether or not of mixed type (22i, 22n) connecting to the integrated circuit of portable objects (4) that are brought in sequential manner in front of an incoming/outgoing position on the transfer line.
- 2.Linear personalization machine in accordance with claim 1, characterized in that said guide support (70) is made up of a parallelepiped plate (71) whose length is approximately equal to twice the length of said personalization elevator (20), comprising a vertical slit (72), two vertical rails (79) and two pulleys (74) joined together by a belt (75).
- 3.Linear personalization machine in accordance with claim 2, characterized in that the driving and positioning means are made up of means (24) for holding in place and sliding said elevator in said rails (73) of said guide support (70), of a driving fixation (28) firmly anchoring the elevator to belt (75) of guide support (70), the vertical slit (72) of guide support (70) forming a track for the driving fixation (28) of said elevator (20), the driving and positioning means allowing each fixed platform (227) to be brought to a halt level with the

portable objects (4) and in the alignment of said transfer system (3) for portable objects.

4. Linear personalization machine according to claim 2, characterized in that said belt (75) of said guide support (70) is periodically set in motion by an electric motor or other power means such that the upward and downward movements of said elevator (20) along the guide support (70) are regularly interrupted at the level of the incoming/outgoing position on the transfer line to enable the loading and unloading of portable objects (4).

5.Linear personalization machine in accordance with claim  
3, characterized in that the driving fixation (28)  
located at the center of said parallelepiped plate (23)  
comprises means, at its end point, for anchoring to said  
15 belt (75) of said guide support (70).

6. Linear personalization machine in accordance with claim 1, characterized in that it comprises a decoder package (250) connected to each first parallel port (216) of each personalization card (21i) by an address bus (257) and a data bus (258), said personalization cards (21i) being connected in parallel to a backplane computer (241) via a second parallel port (215).

7. Linear personalization machine according to claim 1, characterized in that the connection devices (22i) enable testing of the electronic chips and activation of the electric contacts and/or contactless terminals of said portable objects (4).

8. Linear personalization machine in accordance with claim 7, characterized in that when the connection devices (22) have detected a faulty portable object (4), the latter is unloaded from said elevator (20) before its personalization.

9.Linear personalization machine according to claim 1, characterized in that it comprises computer means for personalization control and management (243).

5 10.Linear personalization machine in accordance with claim 9, characterized in that said personalization control and management means (243) trigger a substitution sequence whenever a personalization defect on a portable object (4) is signaled.

10 11.Linear personalization machine in accordance with claim 10, characterized in that the connection devices (22i) test the quality of the personalization of the portable objects (4) and signal any personalization defects to the control and management means (243).

15 12.Linear personalization machine in accordance with claim 9, characterized in that an ejection station (6) located at the exit of said personalization machine (10) tests the quality of personalization of the portable objects (4) and signals any personalization defects to the control and management means (243).

66/780" 46E54E60



ABSTRACT OF THE DISCLOSURELINEAR PERSONALIZATION MACHINE

5 The present invention relates to a linear  
personalization machine comprising a transfer system (3)  
for portable objects (4), incorporating an integrated  
circuit, characterized in that it comprises a  
personalization elevator (20) translated vertically and  
sequentially on a guide support (70) by driving and  
positioning means (24, 73, 28, 75, 72), said elevator  
(20) being made up of a parallelepiped plate (23) fitted  
with a plurality of connection devices whether or not  
10 mixed type (22i, 22n) connecting to the integrated  
circuit of portable objects (4) that are brought in  
sequential manner in front of an incoming/outgoing  
station on the transfer line.

15 Figure 5.

FIG. 1

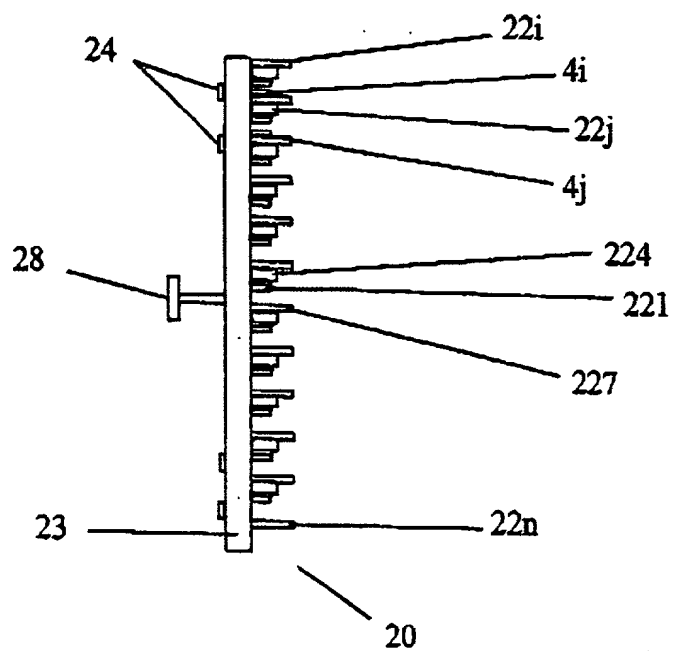


FIG. 2



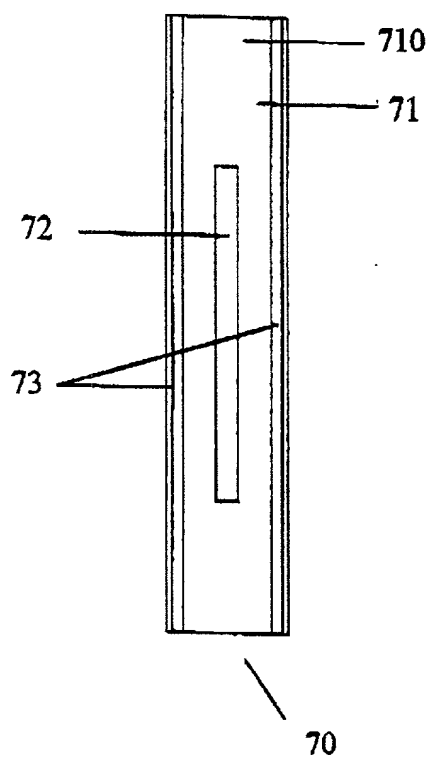


FIG. 3

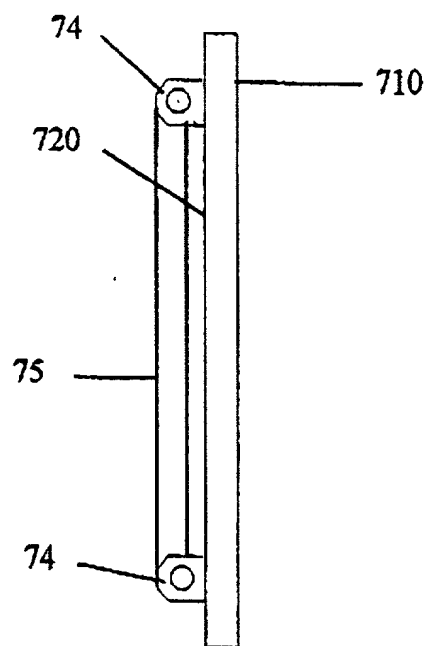


PL 2/4

FIG. 4

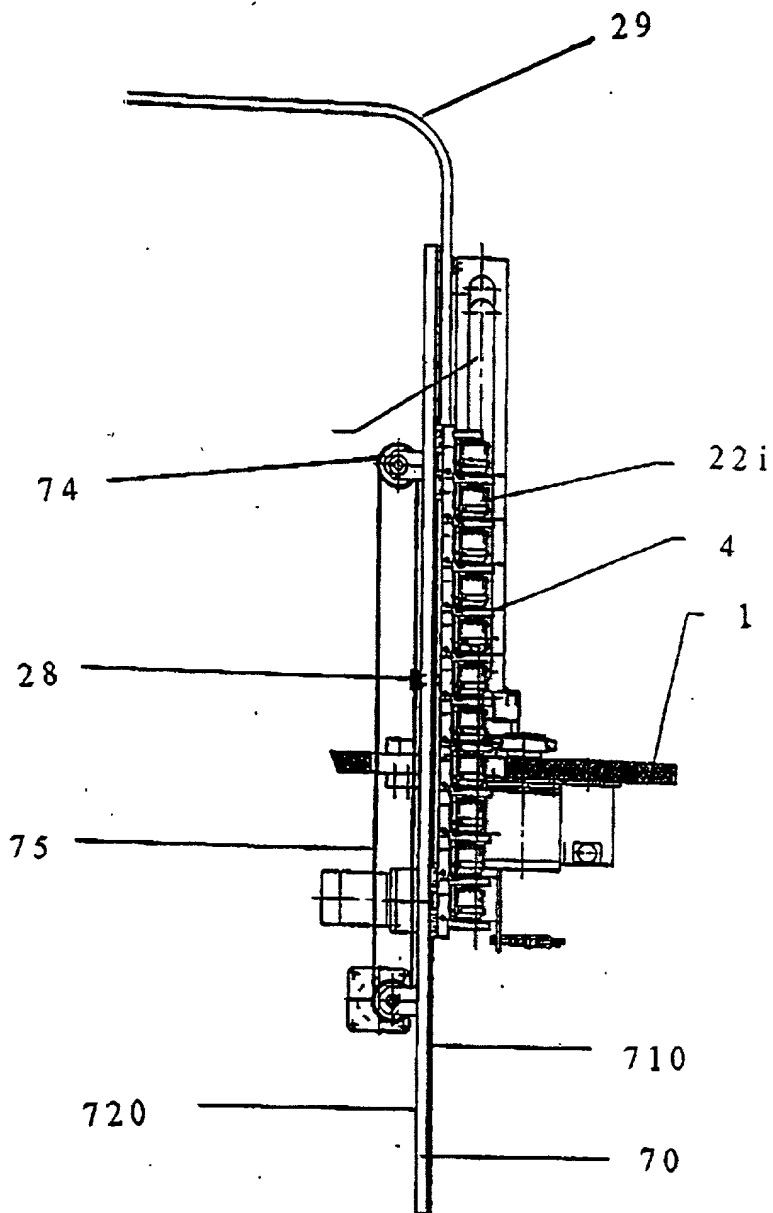

PL 3/4

FIG. 5

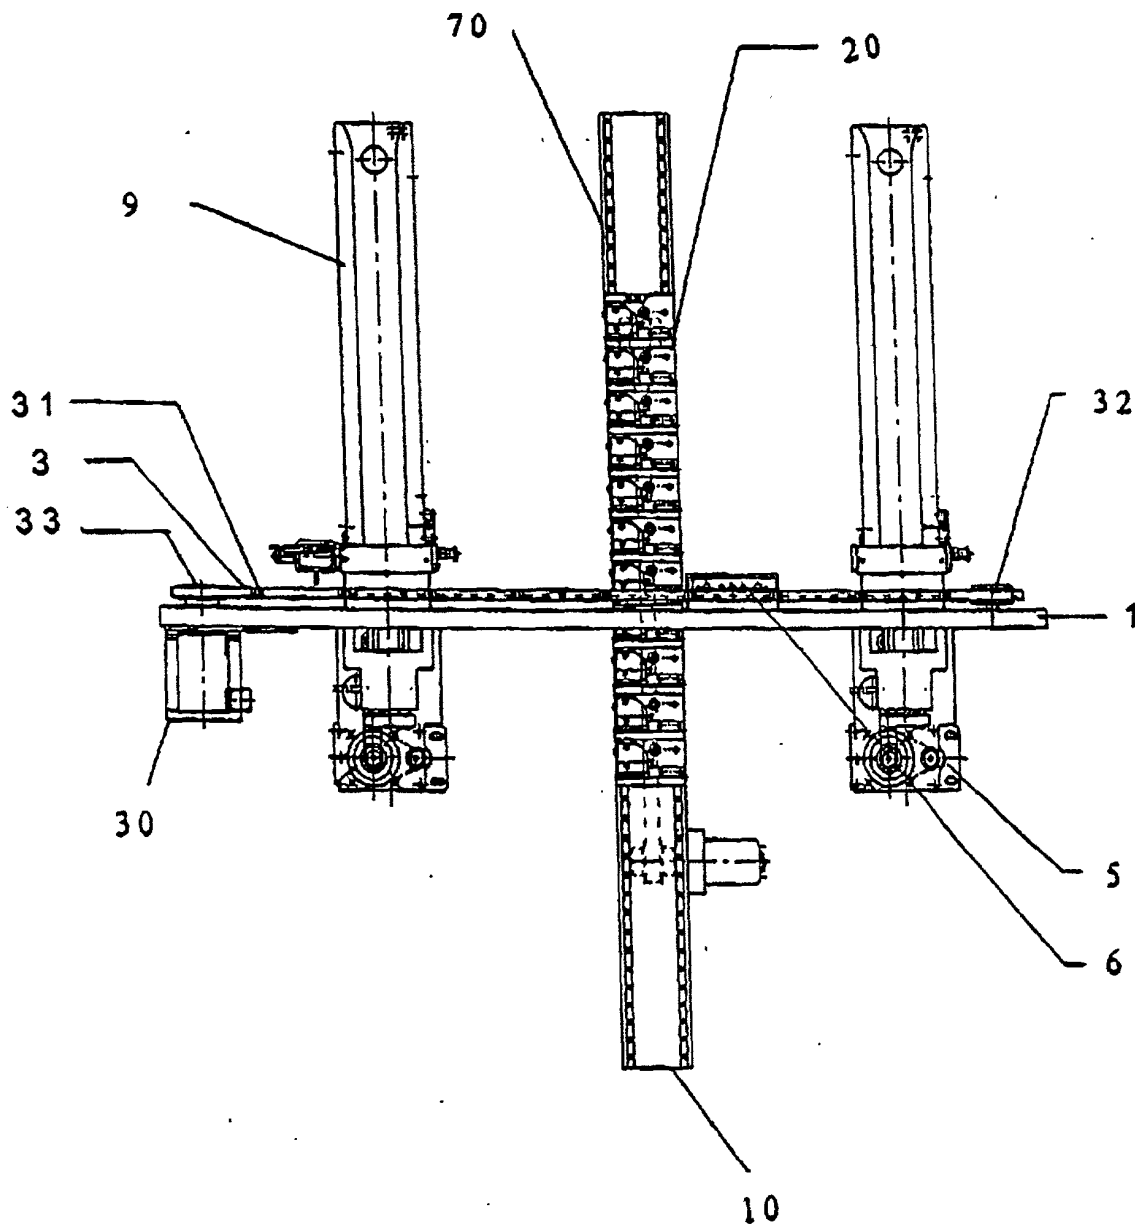

PL. 4 / 4

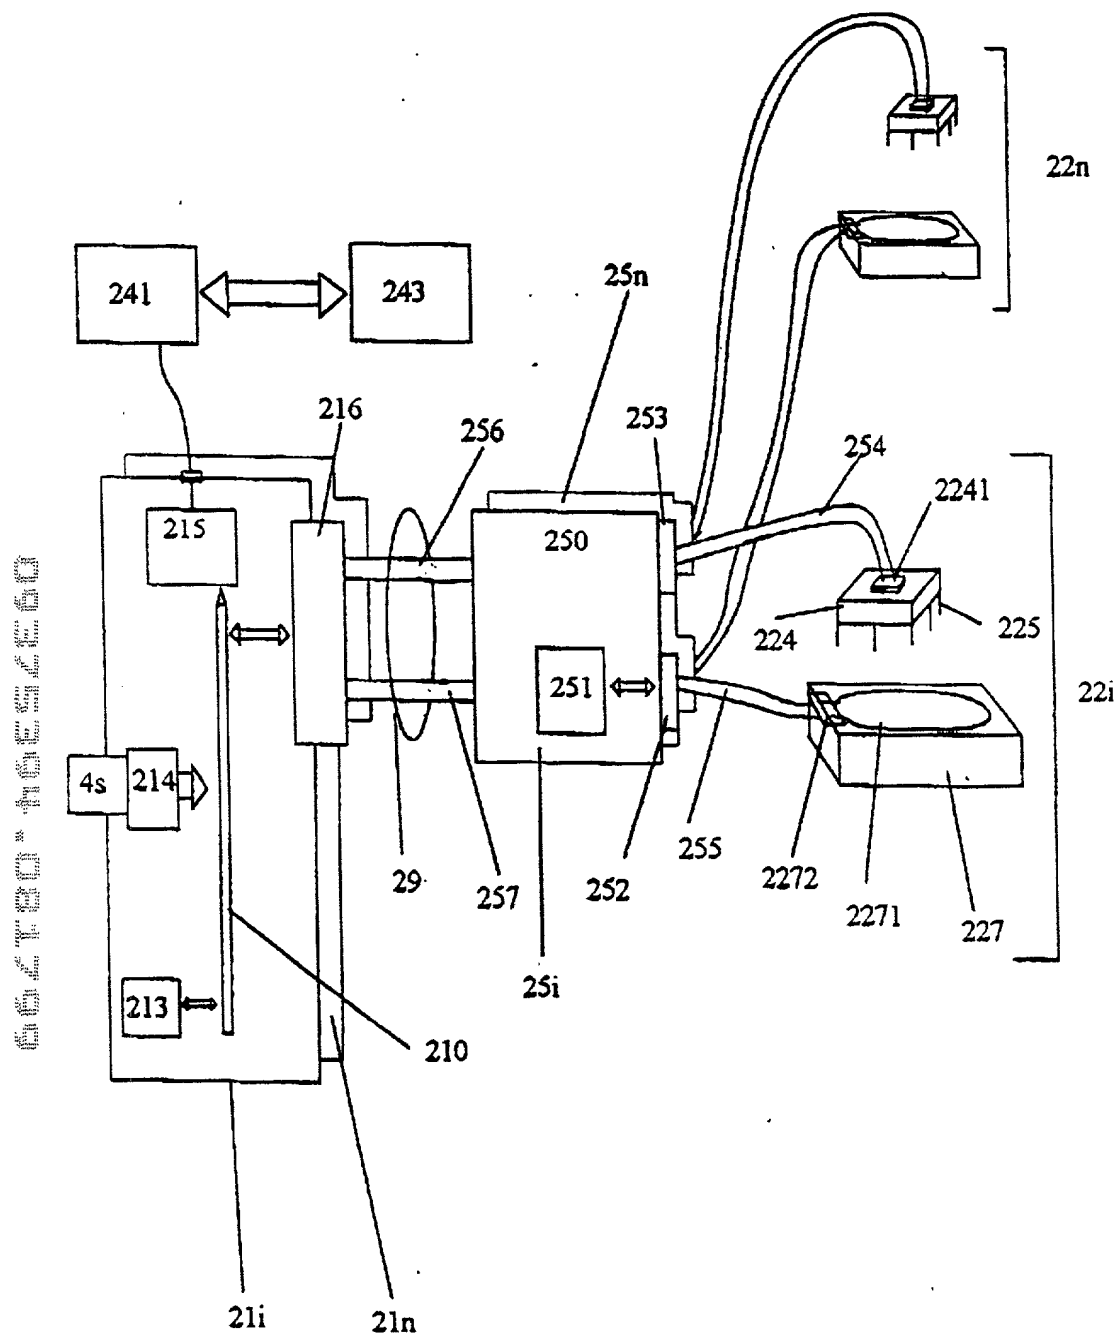


FIG. 6